

Model: RLUM-F200Y-4A



UNIT SPECIFICATIONS

Refrigerant	R404A
Application	Medium Temperature
Cooling Capacity (Qc)	23.8 kW
Power Input (Pi)	17.4 kW
Power Supply	380-420 V / 3Φ / 50 Hz

*Qc (Cooling Capacity) and Pi (Power Input) are based on
Te = -8°C and Tc = +50°C, SH = 10 K and SC = 0 K.
Pi include both the compressor and the fans.*

DIMENSION & WEIGHT

A	1650 mm
B	1100 mm
C	1755 mm
Weight	400 kg

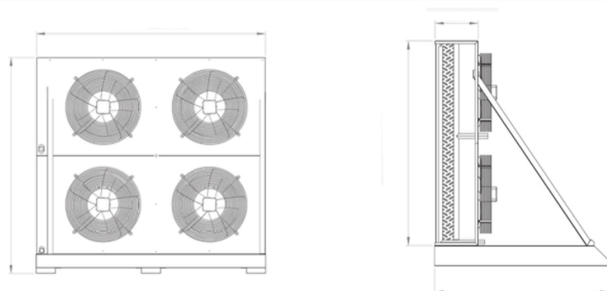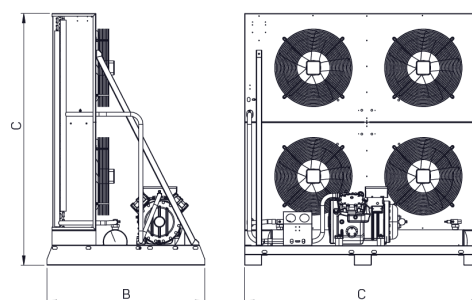


CONDENSER SPECIFICATIONS

Condenser Model	4A
Fan	
Quantity	4
Diameter (mm)	500
Air Flow (m³/h)	18820
Electrical	
Power Input (W)	4 x 850
Condenser Coil	
Internal Volume (L)	16.5
Heat Transfer Area (m²)	88
Receiver	
Volume (L)	30
Rotolock Outlet Connection (Inch)	7/8

COMPRESSOR SPECIFICATIONS

Compressor Model	S20-56Y
Technical Specifications	
Displacement (1450 RPM, 50 Hz)	56 m³/h
No of Pistons	4
Max. Pressure (LP/HP)	20.5 / 30 bar
Suction-line Connection	42 mm -1 5/8"
Discharge-line Connection	28.6 mm -1 1/8"
Motor Version	1
Max. Operating Current	38.4 A
Crankcase Heater	150 W
Oil Type	POE32

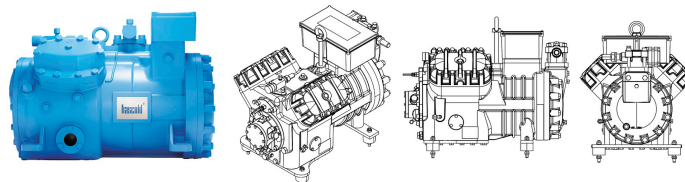

CONTACT
SALES@RIMEGROUP.COM
+971 4 4918522

RIME GROUP FZE
Plot No. M00535 North Zone JAFZA, Dubai, UAE
P.O. Box 26820 | www.rimegroup.com